



WBPA0540L

0.45- 3.8 GHz LOW NOISE WIDE BAND AMPLIFIER

REV D
October 2011

Key Features



- 0.45 ~ 3.8 GHz
- 1.20 dB noise figure
- 40.0 dBm output IP₃
- 45.0 dB Gain
- 24.0 dBm P_{1dB}
- 1.5:1 VSWR
- 30 dBm Input P_{Max} CW
- Single Power Supply
- >34 Years MTBF
- Unconditional Stable
- RoHS Compliant

Product Description

WBPA0540A integrates WanTcom proprietary low noise amplifier technology, high frequency micro electronic assembly techniques, and high reliability design to realize optimum low noise figure, wideband, high linearity, and unconditional stable performances together. With single DC operation, the amplifier has optimal input and output matching in the specified frequency range at 50-Ohm impedance system. The amplifier has standard SMA connectorized WP-9 gold plated housing.

The amplifier is designed to meet the rugged standard of MIL-STD-202.

Applications

- Mobile Infrastructures
- WiMax
- GPS
- CATV/DBS
- Defense
- Security System
- Measurement
- Fixed Wireless

Specifications

Summary of the electrical specifications WBPA0540L at room temperature


Index	Testing Item	Symbol	Test Constraints	Min	Nom	Max	Unit
1	Gain	S ₂₁	0.38 – 3.8 GHz	43	45	47	dB
2	Gain Variation	ΔG	0.38 – 3.8 GHz		+/- 1.0	+/-1.3	dB
3	Input VSWR	SWR ₁	0.38 – 3.8 GHz		1.5:1	1.8:1	Ratio
4	Output VSWR	SWR ₂	0.38 – 3.8 GHz		1.5:1	1.8:1	Ratio
5	Reverse Isolation	S ₁₂	0.38 – 3.8 GHz	65	70		dB
6	Noise figure	NF	0.38 – 3.8 GHz		1.2	1.50	dB
7	Output Power 1dB compression Point	P _{1dB}	0.38 – 3.8 GHz	22	24		dBm
8	Output-Third-Order Interception point	IP ₃	Two-Tone, P _{out} +10 dBm each, 1 MHz separation	36	40		dBm
9	Output-Second-Order Interception point	IP ₂	Two-Tone, P _{out} +10 dBm each, 1 MHz separation	45	47		dBm
10	Current Consumption	I _{dd}	V _{dd} = +11.0 ~ +15.0 V		230		mA
11	Power Supply Voltage	V _{dd}		+11		+15	V
12	Thermal Resistance	R _{th,c}	Junction to case, last stage transistor			100	°C/W
13	Maximum CW Input Power	P _{MAX}	0.38 – 3.8 GHz, CW			30	dBm
14	Operating Temperature	T _o		-40		+85	°C
15	Maximum Pulse RF Input Power	P _{IN,MAX}	0.38 – 3.8 GHz, 50 m Second duration			40	dBm
16	Limiter recover time	T _r	0.38 – 3.8 GHz, after 50 m Second duration			100	uS

Absolute Maximum Ratings

Parameters	Units	Ratings
DC Power Supply Voltage	V	16
Drain Current	mA	250
Total Power Dissipation	W	3.75
RF Input Power, 50 mS duration	dBm	40
Channel Temperature	°C	150
Storage Temperature	°C	-55 ~ 125
Operating Temperature	°C	-40 ~ 85

Operation of this device above any one of these parameters may cause permanent damage.

Functional Block Diagram

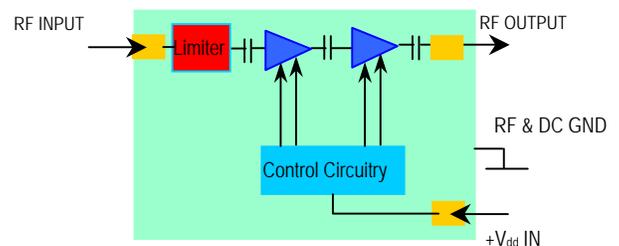

Ordering Information

Specifications and information are subject to change without notice.




WBPA0540L

0.45- 3.8 GHz LOW NOISE WIDE BAND AMPLIFIER

REV D
October 2011


Model Number	WBPA0540L
--------------	-----------

Typical Data

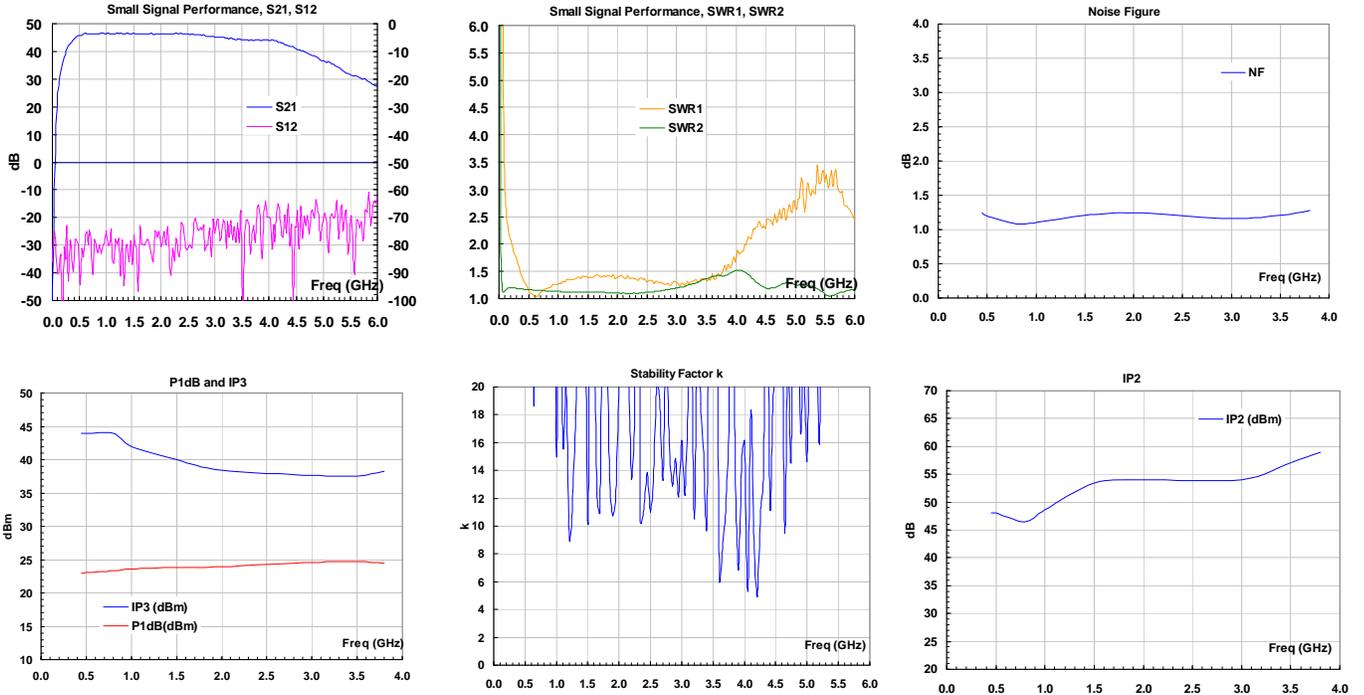

Outline, WP-9 Housing

UNITS: INCH
[mm]
BODY: Brass
Finish: Gold Plating
RF Connector: SMA F Stainless Steel
V_{dd} PWR: Feed through

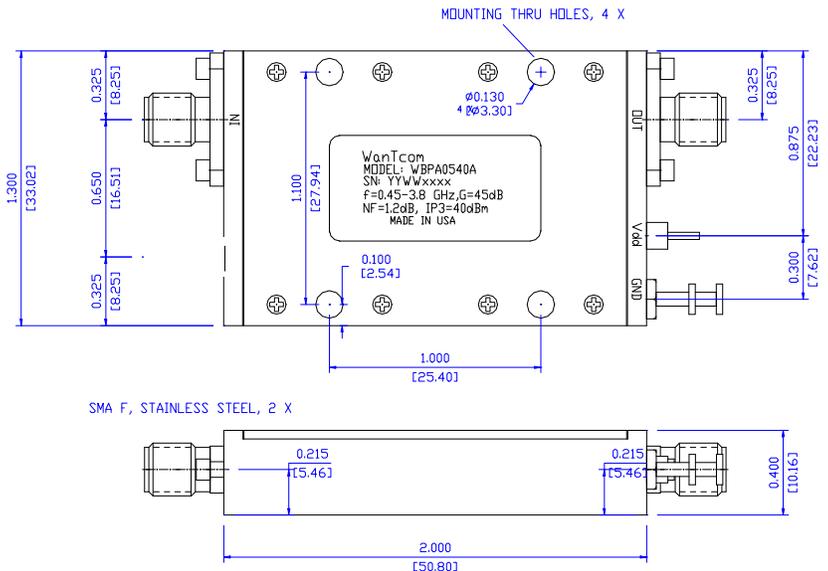

Specifications and information are subject to change without notice.



Application Notes:

A. SMA Torque Wrench Selection

Always use a torque wrench with 5 ~ 6 inch-lb coupling torque setting for mating the SMA cables to the amplifier. Never use torque more than 8 inch-lb wrench for tightening the mating cable to the connector. Otherwise, the permanent damage will occur to the SMA connectors of the amplifier. 8710-1582 (5 inch-lb) is one of the good torque wrench choice from Agilent Technology.

B. DC Power Line Connection

Strip the insulation layer at the end of DC power supply wire. The stripped distance should be in the range of 0.100" to 0.200". The 24 ~ 26 American Wire Gauge wire is suitable. Wound the stripped terminal wire about 1 to 2 turns on the DC feed thru center pin. Solder the wounded wire and the center pin together. Clean the soldering area by Q-tip with alcohol to remove the flux and residue.

Repeat the process to solder the DC return wire on the ground turret.

C. Mounting the Amplifier

Use three pieces of #4-40 with longer than 9/16" screws for mounting the amplifier on a metal-based chase. Flat and spring washers are needed to prevent the screw loosening during the shock and vibration. Always use the appropriate torque setting of the power screwdriver to mount them.
