



WBPA0735A

0.7 – 3.4 GHz 1.6 Watt POWER AMPLIFIER

REV B
May 2018

Key Features



- 50 Ohm Impedance
- 0.7 – 3.4 GHz
- 1.4 dB Noise Figure
- 32.0 dBm P_{1dB}
- 35.0 dB Gain
- +/- 1.0 dB Gain Flatness
- 1.5:1 VSWR
- Single Power Supply
- >68 years MTBF
- Unconditional Stable
- RoHS Compliant

Product Description

WBPA0735A is integrated with WanTcom proprietary low noise amplifier technology, high frequency micro electronic assembly techniques, and high reliability design to realize optimum low noise figure, wideband, high linearity, and unconditional stable performances together. With single +10.0V DC operation, the amplifier has optimal input and output matching in the specified frequency range at 50-Ohm impedance system. The amplifier has standard SMA connectorized WP-6 Gold plated housing.

The amplifier is designed to meet the rugged standard of MIL-STD-202g.

CAUTION:



ELECTROSTATIC DISCHARGE SENSITIVE

Applications

- L & S Band Driver
- Cellular Infrastructure
- PCS and 3 G
- Defense
- Security System
- Measurement
- Fixed Wireless



Specifications

Summary of the electrical specifications WBPA0735A at room temperature


Index	Testing Item	Symbol	Test Constraints	Min	Nom	Max	Unit
1	Gain	S ₂₁	0.7 – 3.4 GHz		35		dB
2	Gain Variation	ΔG	0.7 – 3.4 GHz		+/- 1.0	+/-1.5	dB
3	Input VSWR	SWR ₁	0.7 – 3.4 GHz		1.5	1.8	:1
4	Output VSWR	SWR ₂	0.7 – 3.4 GHz		1.5	1.8	:1
5	Reverse Isolation	S ₁₂	0.7 – 3.4 GHz	50	60		dB
6	Noise Figure	NF	0.7 – 3.4 GHz		1.4	1.8	dB
7	Output 1dB Gain Compression Point	P _{1dB}	0.7 – 3.4 GHz	31	32		dBm
8	Output-Third-Order Interception point	IP ₃	Two-Tone, P _{out} +20 dBm each, 1 MHz separation	42	46		dBm
9	Current Consumption	I _{dd}	V _{dd} = +10 V		0.58		A
10	Power Supply Voltage	V _{dd}		+9	+10		V
11	Thermal Resistance, Junction to case	R _{th,c}	Last stage transistor, V _{ds} = 9.5V, I _{ds} = 420 mA			15	°C/W
12	Operating Temperature	T _o		-40		+85	°C
13	Maximum Input CW RF Power	P _{IN, MAX}	DC – 6 GHz			15	dBm

Absolute Maximum Ratings

Parameters	Units	Ratings
DC Power Supply Voltage	V	12
Drain Current	A	600
Total Power Dissipation	W	7
RF Input Power	dBm	15
Channel Temperature	°C	170
Storage Temperature	°C	-65 ~ 150
Operating Temperature	°C	-20 ~ 85
Thermal Resistance, Last Stage Transistor, R _{th,c}	°C/W	15

Operation of this device above any one of these parameters may cause permanent damage.

Functional Block Diagram

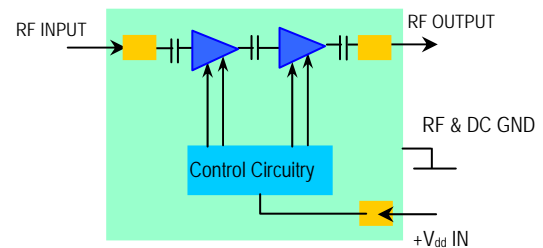






Ordering Information

Model Number	WBPA0735A
--------------	-----------


Specifications and information are subject to change without notice.



Typical Data

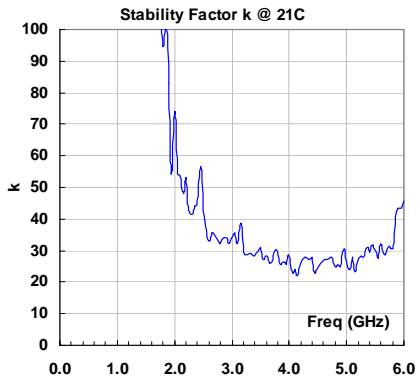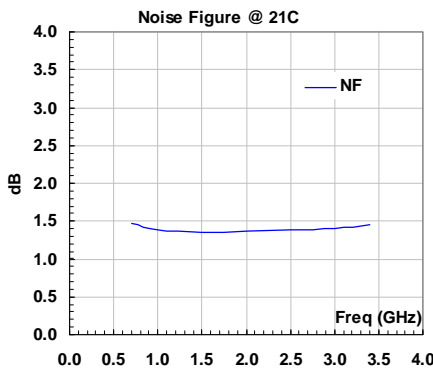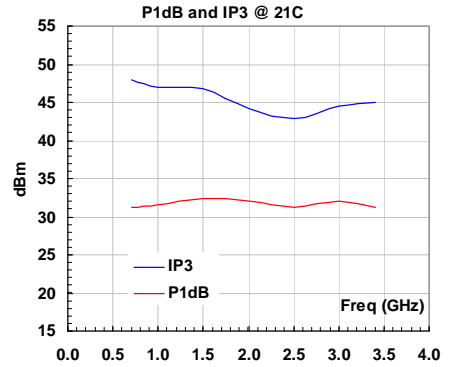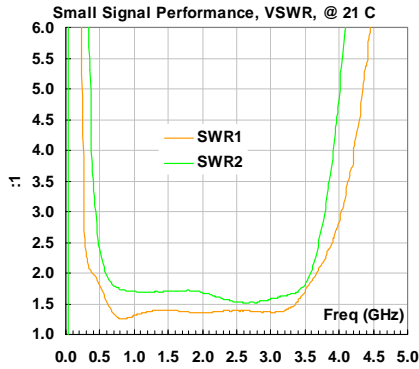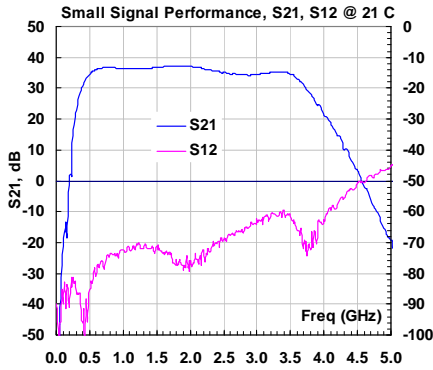

Outline, WP-6 Housing

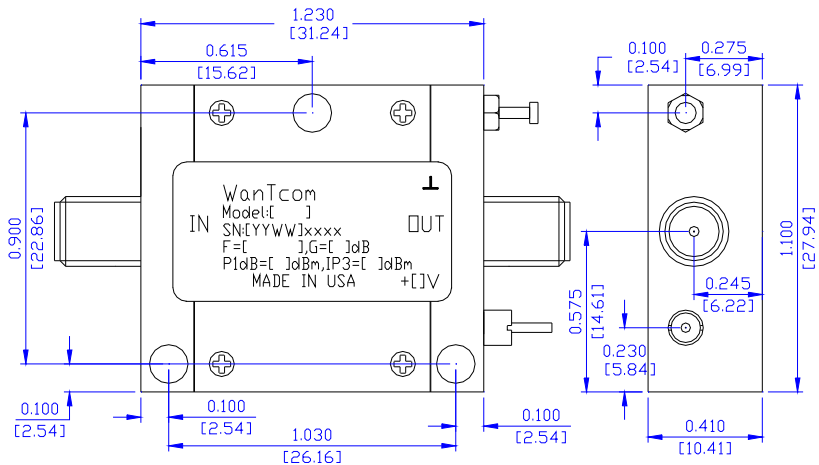

UNITS: INCH
[mm]
BODY: Brass
Finish: Gold Plating
RF Connector: SMA F Gold
V_{dd} PWR: Feed through

Specifications and information are subject to change without notice.



Application Notes:

A. SMA Torque Wrench Selection

Always use a torque wrench with 5 ~ 6 inch-lb coupling torque setting for mating the SMA cables to the amplifier. Never use torque more than 8 inch-lb wrench for tightening the mating cable to the connectors. Otherwise, the permanent damage will occur to the SMA connectors of the amplifier. 8710-1582 (5 inch-lb) is one of the ideal torque wrench choice from Agilent Technology.

B. DC Power Line Connection

Strip the insulation layer at the end of DC power supply wire. The stripped length should be around 0.100" to 0.200". The 24 ~ 26 American Wire Gauge wire is suitable. Wound the stripped wire about 3/4 to 1 turn on the DC feed thru center pin. Solder the wounded wire and the center pin together. Clean the soldering joint by a Q-tip with alcohol to remove the flux and residue.

Do not use large soldering iron tip with more than 750 degree Fahrenheit to solder the wire and feed thru pin. Damage may occur to the feed thru. 0.010" size tip with 750 degree Fahrenheit temperature setting is suitable for the soldering works.

Repeat the process to solder the DC return wire on the ground turret. Higher temperature and larger tip can be used for this ground soldering.

C. Mounting the Amplifier

Use three pieces of #4-40 with longer than 9/16" screws for mounting the amplifier on a metal-based chase. Flat and spring washers are needed to prevent the screw loosening during the shock and vibration. Always use the appropriate torque setting of the power screwdriver to mount them.

High thermal conductivity thermal film such as T-gon is needed between the bottom of the PA and the heat sink surface. Refer to AN-155 for heat sink design, http://wantcominc.com/engineering_tools.htm .
