



WBA2060A

2.0 – 6.0 GHz SUPER LOW NOISE WIDE BAND AMPLIFIER

REV A

November 2008

Key Features

- 2.0 ~ 6.0 GHz
- 0.75 dB noise figure
- 22.0 dBm output IP₃
- 27.0 dB Gain
- 12.0 dBm P_{1dB}
- 1.5:1 VSWR
- Single Power Supply
- RoHS Compliant
- Unconditional Stable, $k > 1$



Applications

- Mobile Infrastructures
- WiMAX
- Defense
- Measurement
- Fixed Wireless



Absolute Maximum Ratings



Parameters	Units	Rating
DC Power Supply Voltage	V	6.0
Drain Current	mA	50
Total Power Dissipation	mW	300
RF Input Power	dBm	10
Channel Temperature	°C	150
Storage Temperature	°C	-55~125
Operating Temperature	°C	-40~85
Thermal Resistance	°C/W	220

Operation of this device above any one of these parameters may cause permanent damage.

Specifications

Summary of the electrical specifications WBA2060A at room temperature

Index	Testing Item	Symbol	Test Constraints	Min	Nom	Max	Unit
1	Gain	S ₂₁	2.0 – 6.0 GHz	24	27		dB
2	Gain Variation	ΔG	2.0 – 6.0 GHz		+/- 1.5		dB
3	Input VSWR	SWR ₁	2.0 – 6.0 GHz	1.8	1.5		Ratio
4	Output VSWR	SWR ₂	2.0 – 6.0 GHz	1.8	1.4		Ratio
5	Reverse Isolation	S ₁₂	2.0 – 6.0 GHz		40		dB
6	Noise figure	NF	2.0 – 6.0 GHz		0.75	0.90	dB
7	Output Power 1dB compression Point	P _{1dB}	2.0 – 6.0 GHz	10	12		dBm
8	Output-Third-Order Interception point	IP ₃	Two-Tone, P _{out} = 0 dBm each, 1 MHz separation		22		dBm
9	Current Consumption	I _{dd}	@ 25 °C		40		mA
10	Power Supply Voltage	V _{dd}	WBA2060A	+4.7	+5.0	+5.3	V
11	Thermal Resistance	R _{th,jc}	Junction to case			220	°C/W
12	Operating Temperature	T _o	Case temperature at the bottom of the housing	-40		+85	°C
13	Maximum Average RF Input Power	P _{IN,MAX}	DC – 13 GHz			10	dBm
14	Spurious	P _{spur}	DC – 13 GHz	-70			dBc
15	Weight				13		Grams

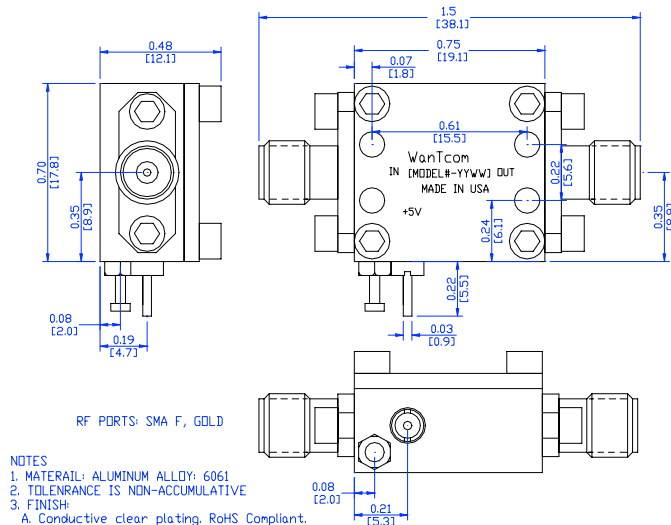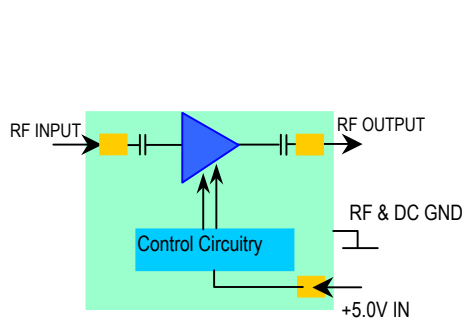

Ordering Information


Model Number	WBA2060A
--------------	----------

Outline, WP-30 Housing

Specifications and information are subject to change without notice.



Typical Performance

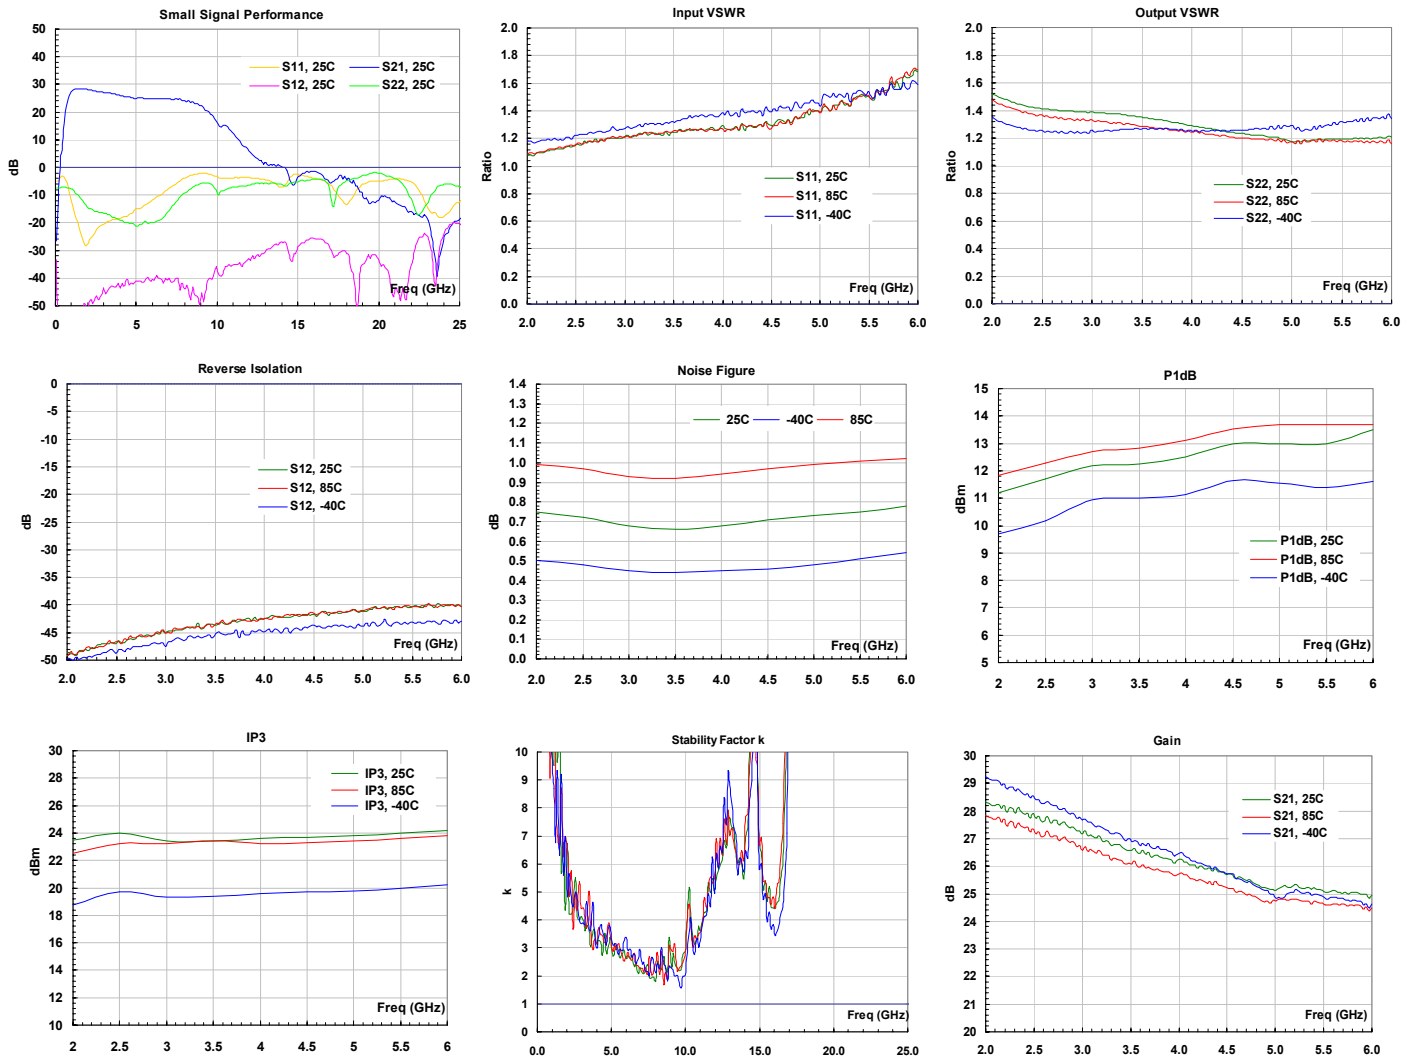

Application Notes:

A. SMA Torque Wrench Selection

Always use a torque wrench with 5 ~ 6 inch-lb coupling torque setting for mating the SMA cables to the amplifier. Never use torque more than 8 inch-lb wrench for tightening the mating cable to the connector. Otherwise, the permanent damage will occur to the SMA connectors of the amplifier. 8710-1582 (5 inch-lb) is one of the ideal torque wrench choice from Agilent Technology.

B. Mounting the Amplifier

Use three pieces of #2-56 with longer than 9/16" screws for mounting the amplifier on a metal-based chase. Flat and spring washers are needed to prevent the screw loosening during the shock and vibration. Always use the appropriate torque setting of the power screwdriver to mount them.

Specifications and information are subject to change without notice.