



WBPA0438A

0.4- 3.8 GHz LOW NOISE WIDE BAND AMPLIFIER

REV D
November 2017

Key Features



- 50 Ohm Impedance
- 0.4 ~ 3.8 GHz
- 1.20 dB Noise Figure
- 45.0 dBm output IP₃
- 36.0 dB Gain
- 27.0 dBm P_{1dB}
- 1.5:1 VSWR
- Single Power Supply
- >34 years MTBF
- Unconditional stable
- RoHS compliant

Product Description



WBPA0438A is integrated with WanTcom proprietary low noise amplifier technology, high frequency micro electronic assembly techniques, and high reliability design to realize optimum low noise figure, wideband, high linearity, and unconditional stable performances together. With single DC operation, the amplifier has optimal input and output matching in the specified frequency range at 50-Ohm impedance system. The amplifier has standard SMA connectorized WP-9 Gold plated housing.

The amplifier is designed to meet the rugged standard of MIL-STD-202g.

Applications

- Mobile Infrastructures
- WiMax
- GPS
- PCS & 3G
- Defense
- Security System
- Measurement
- Fixed Wireless



Specifications

Summary of the electrical specifications WBPA0438A at room temperature


Index	Testing Item	Symbol	Test Constraints	Min	Nom	Max	Unit
1	Gain	S ₂₁	0.4 – 3.8 GHz		36		dB
2	Gain Variation	ΔG	0.4 – 3.8 GHz		+/- 1.0	+/-1.5	dB
3	Input VSWR	SWR ₁	0.4 – 3.8 GHz		1.5:1	2:1	Ratio
4	Output VSWR	SWR ₂	0.4 – 3.8 GHz		1.5:1	2:1	Ratio
5	Reverse Isolation	S ₁₂	0.4 – 3.8 GHz		60		dB
6	Noise Figure	NF	0.4 – 3.8 GHz		1.20	1.5	dB
7	Output 1dB Gain Compression Point	P _{1dB}	0.4 – 3.8 GHz	24	27		dBm
8	Output-Third-Order Interception Point	IP ₃	0.38 – 2.0 GHz, Two-Tone, P _{out} +10 dBm each, 1 MHz separation	43	45		dBm
			2.0 – 3.8 GHz, Two-Tone, P _{out} +10 dBm each, 1 MHz separation	40	45		
9	Current Consumption	I _{dd}			400		mA
10	Power Supply Voltage	V _{dd}		+12	+15	+16	V
11	Thermal Resistance, Junction to case	R _{th,c}	Last stage transistor, V _{ds} = 9V, I _{ds} = 150 mA			45	°C/W
12	Operating Temperature	T _o		-40		+85	°C
13	Maximum Average RF Input Power	P _{IN, MAX}	DC – 6.0 GHz			10	dBm

Absolute Maximum Ratings

Parameters	Units	Ratings
DC Power Supply Voltage	V	18
Drain Current	mA	500
Total Power Dissipation	W	3.5
Input CW RF Power	dBm	10
Channel Temperature	°C	170
Storage Temperature	°C	-55 ~ 125
Operating Temperature	°C	-40 ~ 85
Thermal Resistance	°C/W	45

Operation of this device above any one of these parameters may cause permanent damage.

Functional Block Diagram

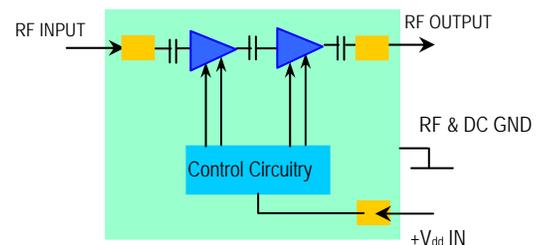

Ordering Information

Model Number	WBPA0438A
--------------	-----------

Specifications and information are subject to change without notice.








WBPA0438A

0.4- 3.8 GHz LOW NOISE WIDE BAND AMPLIFIER


REV D
November 2017

Typical Data

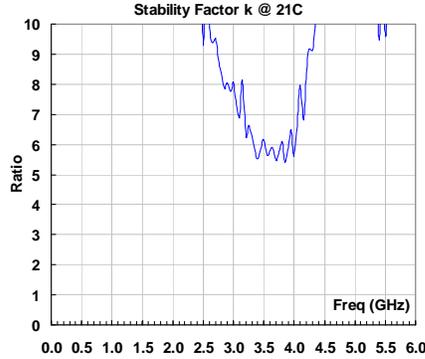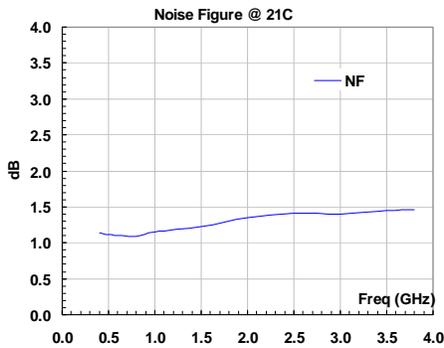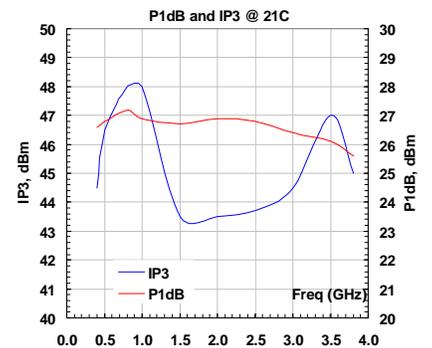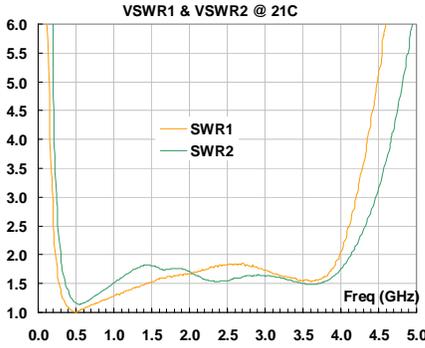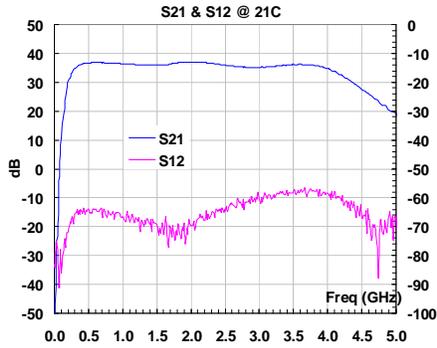

Outline, WP-9 Housing

UNITS: INCH
[mm]
BODY: Brass
Finish: Gold Plating
RF Connector: SMA F Gold
V_{dd} PWR: Feed through

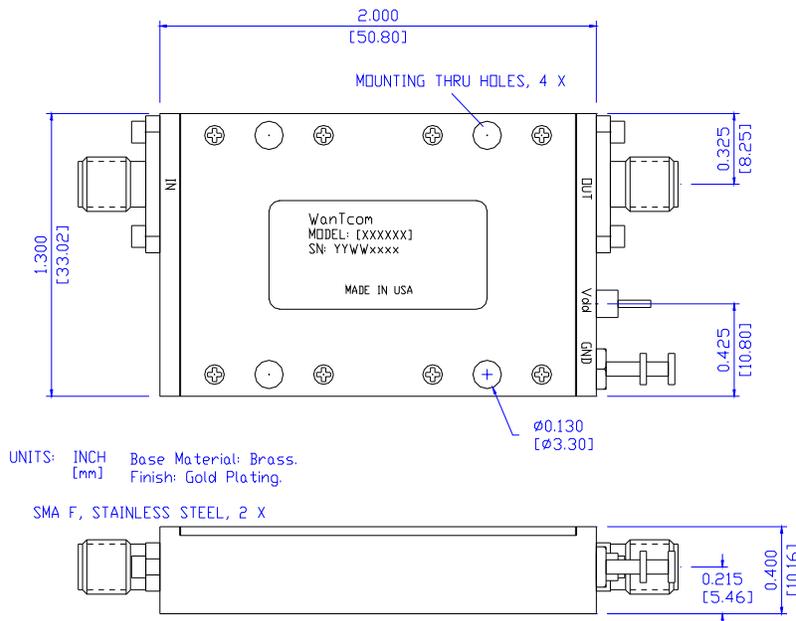

Specifications and information are subject to change without notice.



Application Notes:

A. SMA Torque Wrench Selection

Always use a torque wrench with 5 ~ 6 inch-lb coupling torque setting for mating the SMA cables to the amplifier. Never use torque more than 8 inch-lb wrench for tightening the mating cable to the connector. Otherwise, the permanent damage will occur to the SMA connectors of the amplifier. 8710-1582 (5 inch-lb) is one of the good torque wrench choice from Agilent Technology.

B. DC Power Line Connection

Strip the insulation layer at the end of DC power supply wire. The stripped distance should be in the range of 0.100" to 0.200". The 24 ~ 26 American Wire Gauge wire is suitable. Wound the stripped terminal wire about 1 to 2 turns on the DC feed thru center pin. Solder the wounded wire and the center pin together. Clean the soldering area by Q-tip with alcohol to remove the flux and residue.

Repeat the process to solder the DC return wire on the ground turret.

C. Mounting the Amplifier

Use four pieces of #4-40 with longer than 9/16" screws for mounting the amplifier on a metal-based chase. Flat and spring washers are needed to prevent the screw loosening during the shock and vibration. Always use the appropriate torque setting of the power screwdriver to mount them. Additional heat sink is required. T-gon thermal film is required between the bottom of the PA and the chase for the effective thermal dissipation. Refer to AN-155 for heat sink design, http://wantcominc.com/engineering_tools.htm.
