



WBA2237-40A

2.2 – 3.7 GHz LOW NOISE WIDE BAND AMPLIFIER

REV A
June 2011

Key Features



- 2.2 ~ 3.7 GHz
- 0.80 dB Noise Figure
- 26.0 dBm Output IP₃
- 39.0 dB Gain
- +/-0.5 dB Gain Flatness
- 13.0 dBm P_{1dB}
- 1.4:1 VSWR
- Single Power Supply
- >34 years MTBF
- Unconditional Stable
- RoHS Compliant

Product Description

WBA2237-40A integrates WanTcom proprietary low noise amplifier technology, high frequency micro electronic assembly techniques, and high reliability design to realize optimum low noise figure, wideband, high linearity, and unconditional stable performances together. With single +5.0V DC operation, the amplifier has optimal input and output matching in the specified frequency range at 50-Ohm impedance system. The amplifier has standard SMA connectorized WP-5 gold plated housing.

The amplifier is designed to meet the rugged standard of MIL-STD-202.

Applications

- Mobile Infrastructures
- 3G
- WiMAX
- Defense
- Security System
- Measurement
- Fixed Wireless



Specifications

Summary of the electrical specifications WBA2237-40A at room temperature


Index	Testing Item	Symbol	Test Constraints	Min	Nom	Max	Unit
1	Gain	S ₂₁	2.2 – 3.7 GHz		39		dB
2	Gain Variation	ΔG	2.2 – 3.7 GHz		+/- 0.5	+/- 1.0	dB
3	Input VSWR	SWR ₁	2.2 – 3.7 GHz		1.45:1	1.6:1	Ratio
4	Output VSWR	SWR ₂	2.2 – 3.7 GHz		1.25:1	1.5:1	Ratio
5	Reverse Isolation	S ₁₂	2.2 – 3.7 GHz		50		dB
6	Noise figure	NF	2.2 – 3.7 GHz		0.80	0.95	dB
7	Output Power 1dB compression Point	P _{1dB}	2.2 – 3.7 GHz	10	13		dBm
8	Output-Third-Order Interception point	IP ₃	Two-Tone, P _{out} +0 dBm each, 1 MHz separation		26		dBm
9	Current Consumption	I _{dd}	V _{dd} = +5 V		65		mA
10	Power Supply Voltage	V _{dd}	WBA2237-40A	+4.7	+5	+5.3	V
11	Thermal Resistance	R _{th,c}	Junction to case			220	°C/W
12	Operating Temperature	T _o		-40		+85	°C
13	Maximum Average RF Input Power	P _{IN, MAX}	DC – 26 GHz			10	dBm

Absolute Maximum Ratings

Parameters	Units	Ratings
DC Power Supply Voltage	V	6.0
Drain Current	mA	100
Total Power Dissipation	mW	500
RF Input Power	dBm	5
Channel Temperature	°C	150
Storage Temperature	°C	-55 ~ 125
Operating Temperature	°C	-40 ~ 85
Thermal Resistance	°C/W	220

Operation of this device above any one of these parameters may cause permanent damage.

Functional Block Diagram

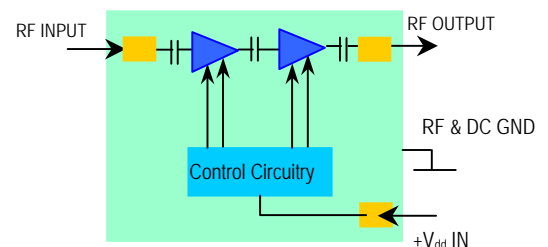


Ordering Information

Model Number	WBA2237-40A
--------------	-------------

Specifications and information are subject to change without notice.




Typical Data

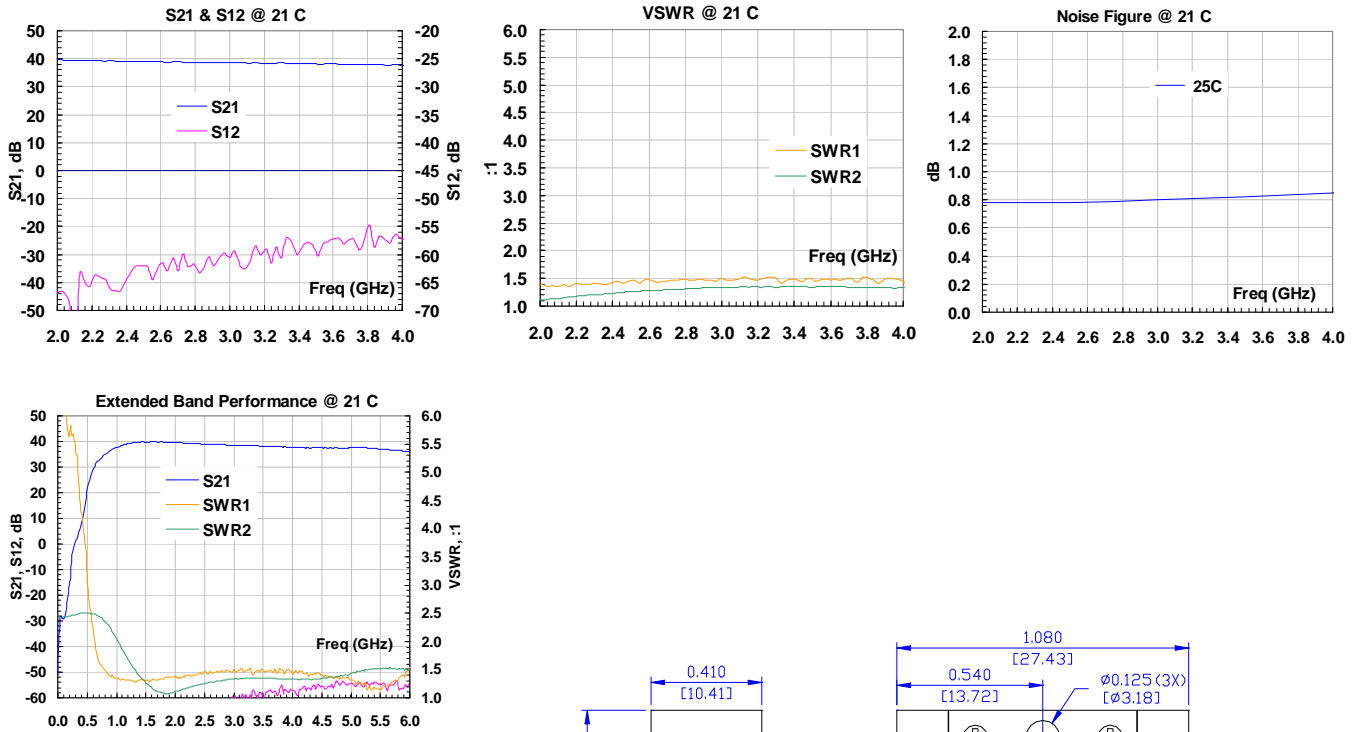

Outline, WP-5 Housing

UNITS:	INCH
	[mm]
BODY:	Brass
Finish:	Gold Plating
RF Connector:	SMA F Gold
V _{dd} PWR:	Feed through

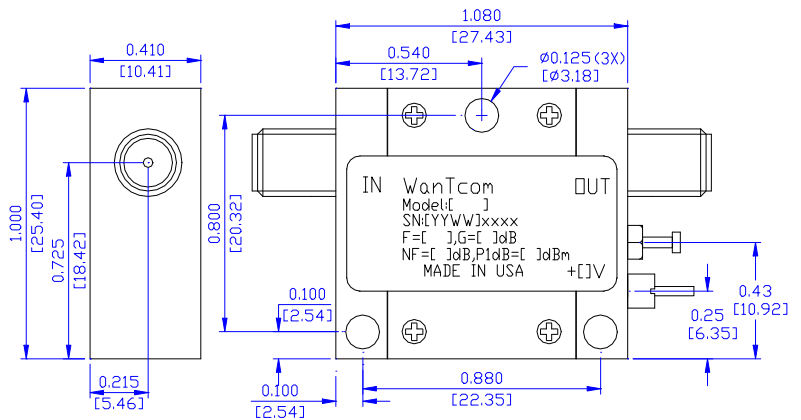

Application Notes:

A. SMA Torque Wrench Selection

Always use a torque wrench with 5 ~ 6 inch-lb coupling torque setting for mating the SMA cables to the amplifier. Never use torque more than 8 inch-lb wrench for tightening the mating cable to the connector. Otherwise, the permanent damage will occur to the SMA connectors of the amplifier. 8710-1582 (5 inch-lb) is one of the ideal torque wrench choice from Agilent Technology.

B. Mounting the Amplifier

Use three pieces of #4-40 with longer than 9/16" screws for mounting the amplifier on a metal-based chase. Flat and spring washers are needed to prevent the screw loosening during the shock and vibration. Always use the appropriate torque setting of the power screwdriver to mount them.

Specifications and information are subject to change without notice.