



# WLLA0530A

## 400 – 3000 MHz LIMITER LOW NOISE WIDE BAND AMPLIFIER

REV B  
February 2017

### Key Features

- 400 ~ 3000 MHz
- 1.20 dB Noise Figure
- 20.0 dBm Output IP<sub>3</sub>
- 15.0 dB Gain
- 10.0 dBm P<sub>1dB</sub>
- 1.5:1 VSWR
- Single Power Supply
- RoHS Compliant
- 30 dBm Maximum Pin



### Applications

- Mobile Infrastructures
- Cellular, GPS, 3G, ISM
- Security System
- Measurement
- Fixed Wireless



### Absolute Maximum Ratings

Parameters	Units	Rating
DC Power Supply Voltage	V	6.0
Drain Current	mA	50
Total Power Dissipation	mW	300
Input CW RF Power	dBm	30
Channel Temperature	°C	150
Storage Temperature	°C	-55~125
Operating Temperature	°C	-40~85
Thermal Resistance	°C/W	220



Operation of this device above any one of these parameters may cause permanent damage.



### Specifications

Summary of the electrical specifications WLLA0530A at room temperature

Index	Testing Item	Symbol	Test Constraints	Min	Nom	Max	Unit
1	Gain	S <sub>21</sub>	400 – 3000 MHz		15		dB
2	Gain Variation	ΔG	400 – 3000 MHz		+/- 0.5	+/-0.75	dB
3	Input VSWR	SWR <sub>1</sub>	400 – 3000 MHz		1.4:1	1.5:1	Ratio
4	Output VSWR	SWR <sub>2</sub>	400 – 3000 MHz		1.4:1	1.5:1	Ratio
5	Reverse Isolation	S <sub>12</sub>	400 – 3000 MHz		20		dB
6	Noise Figure	NF	400 – 3000 MHz		1.2	1.4	dB
7	Output 1dB Gain Compression Point	P <sub>1dB</sub>	400 – 3000 MHz	9	12		dBm
8	Output-Third-Order Interception Point	IP <sub>3</sub>	Two-Tone, P <sub>out</sub> = 0 dBm each, 1 MHz separation	18	22		dBm
9	Current Consumption	I <sub>dd</sub>	@ 21 °C		25		mA
10	Power Supply Voltage	V <sub>dd</sub>		+4.7	+5.0	+5.3	V
11	Thermal Resistance	R <sub>th,c</sub>	Junction to case			220	°C/W
12	Operating Temperature	T <sub>o</sub>	Case temperature at the bottom of the housing	-40		+85	°C
13	Maximum Input CW RF Power	P <sub>IN,MAX</sub>	DC – 13 GHz			30	dBm
14	Spurious	P <sub>spur</sub>	DC – 13 GHz	-70			dBc

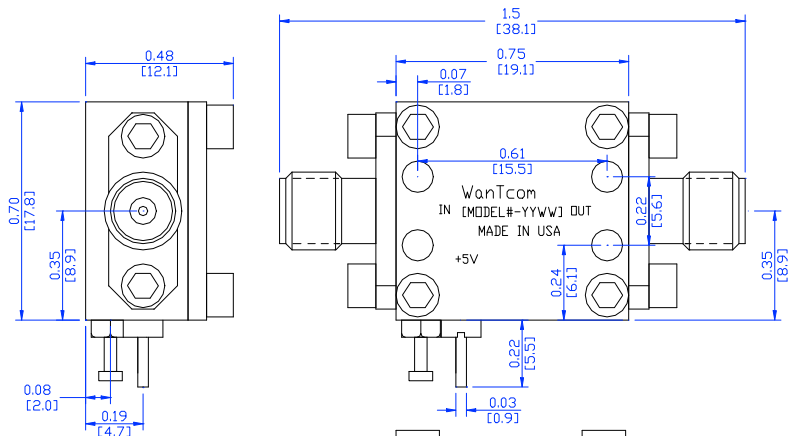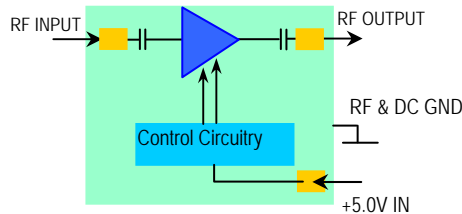

RF PORTS: SMA F, GOLD

- NOTES
1. MATERAIL: ALUMINUM ALLOY: 6061
  2. TOLERANCE IS NON-ACCUMULATIVE
  3. FINISH:
    - A. Conductive clear plating. RoHS Compliant.

### Outline, WP-30 Housing










### Ordering Information

Model Number	WLLA0530A
--------------	-----------

Specifications and information are subject to change without notice.



### Typical Performance

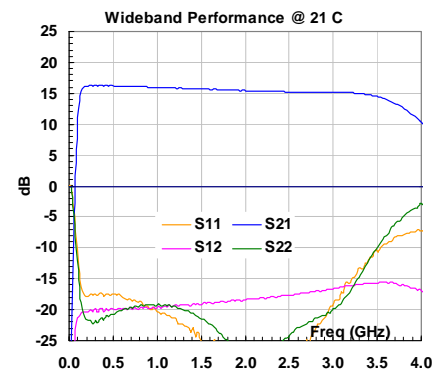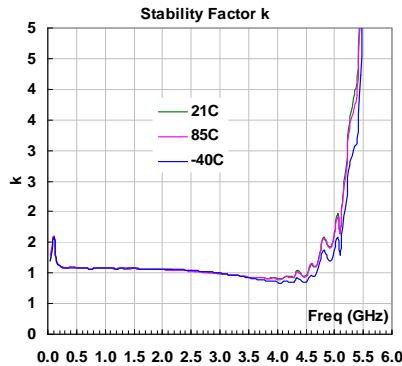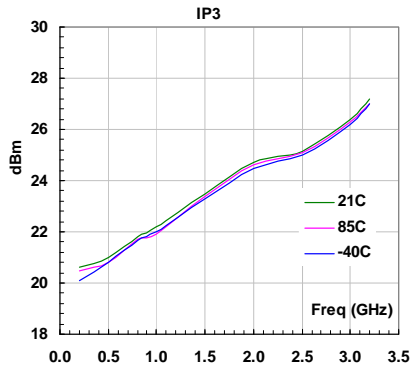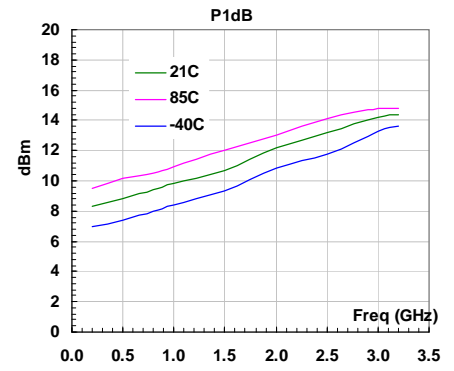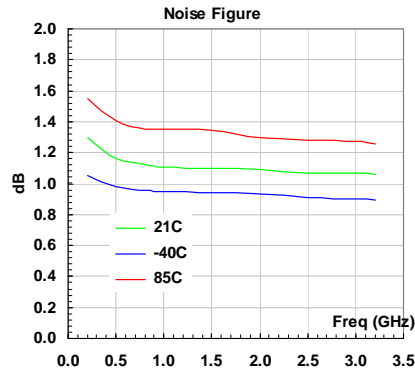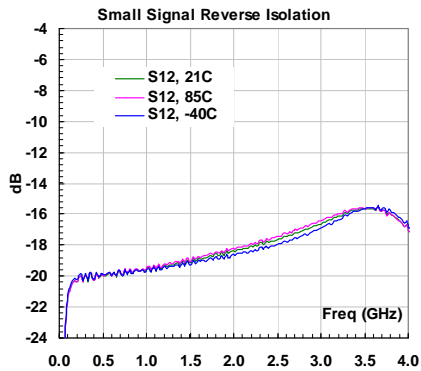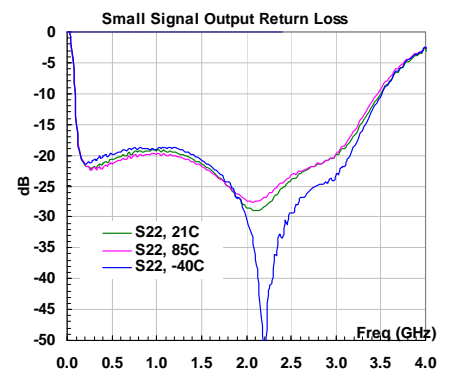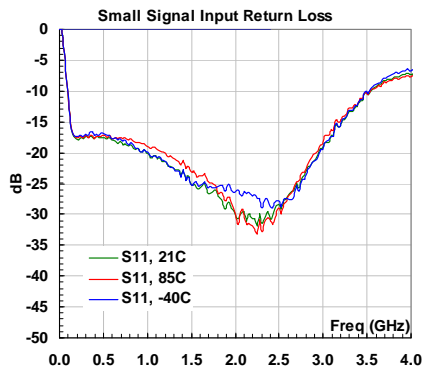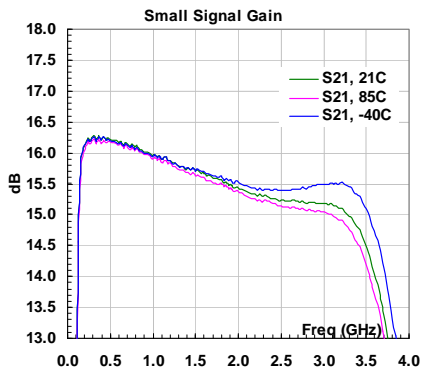

Specifications and information are subject to change without notice.



## Application Notes

### A. SMA Torque Wrench Selection

Always use a torque wrench with 5 ~ 6 inch-lb coupling torque setting for mating the SMA cables to the amplifier. Never use torque more than 8 inch-lb wrench for tightening the mating cable connector to the amplifier connector. Otherwise, the permanent damage will occur to the SMA connectors of the amplifier. 8710-1582 (5 inch-lb) is one of the ideal torque wrench choice from Keysight Technology.

### B. Mounting the Amplifier

Use three pieces of #2-56 with longer than 9/16" screws for mounting the amplifier on a metal-based chase. Flat and spring washers are needed to prevent the screw loosening for shock and vibration. Always use the appropriate torque setting of the power screwdriver to mount the screws.

### C. Soldering DC Power Supply Wires

Always turn off the DC power supply of +5.0V when connect the DC cables to the amplifier. Only turn on the power supply after the correct connections and +5.0V DC voltage are confirmed. Any accidentally short the live +5.0V to the ground while applying DC cable to the DC feed thru pin may damage the amplifier.

The AWG of 18 ~ 24 insulated wires are recommended for the DC cables. Red and Black color wires are recommended for +5.0V and its return for easier identification of the polarity to avoid the wrong DC bias. Only 3/4 to 1 turn wrap around the feed thru pin and ground turret per the IPC standard.

Do not use large soldering iron tip with more than 750 degree Fahrenheit to solder the wire and feed thru pin. Damage may occur to the feed thru. 0.010" size tip with 750 degree Fahrenheit temperature setting is suitable for the soldering works.

Repeat the process to solder the DC return wire on the ground turret. Higher temperature and larger tip can be used for this ground soldering.

\*\*\*\*\*